

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

8-26-03



In re Patent Application of

FYVIE

Atty. Ref.: 3889-10

Serial No.

Group:

Filed: November 8, 2001

Examiner:

For: AN ARRANGEMENT FOR CAPTURING DATA

November 8, 2001

Assistant Commissioner for Patents
Washington, DC 20231

SUBMISSION OF PRIORITY DOCUMENT

Sir:

It is respectfully requested that this application be given the benefit of the foreign filing date under the provisions of 35 U.S.C. §119 of the following, a certified copy of which is submitted herewith:

Application No.

Country of Origin

Filed

0004115-2

Sweden

10 November 2000

Respectfully submitted,

NIXON & VANDERHYE P.C.

By:

John R. Lastova

Reg. No. 33,149

JRL:mm

1100 North Glebe Road, 8th Floor
Arlington, VA 22201-4714
Telephone: (703) 816-4000
Facsimile: (703) 816-4100

PRV

PATENT- OCH REGISTRERINGSVERKET

Patentavdelningen

J0978 U.S. PRO
09/986460
11/08/01

Intyg Certificate

Härmed intygas att bifogade kopior överensstämmer med de handlingar som ursprungligen ingivits till Patent- och registreringsverket i nedannämnda ansökan.

This is to certify that the annexed is a true copy of the documents as originally filed with the Patent- and Registration Office in connection with the following patent application.

(71) Sökande Telefonaktiebolaget L M Ericsson, Stockholm SE
Applicant (s)

(21) Patentansökningsnummer 0004115-2
Patent application number

(86) Ingivningsdatum 2000-11-10
Date of filing

Stockholm, 2001-09-05

För Patent- och registreringsverket
For the Patent- and Registration Office


Rjördis Segerlund

Avgift
Fee 170:-

**CERTIFIED COPY OF
PRIORITY DOCUMENT**

**PATENT- OCH
REGISTRERINGSVERKET
SWEDEN**

Postadress/Adress
Box 5055
S-102 42 STOCKHOLM

Telefon/Phone
+46 8 782 25 00
Vx 08-782 25 00

Telex
17978
PATOREG S

Telefax
+46 8 666 02 88
08-666 02 88

AN ARRANGEMENT FOR CAPTURING DATA

TECHNICAL FIELD

5 The invention relates generally to data reception and more specifically to the capture and resynchronization of data from a high-speed data stream.

BACKGROUND OF THE INVENTION

Today, i.e. the below techniques are used to capture data from a data stream.

10 Clock recovery using a phase-locked loop steered by the data.

The disadvantage of this technique is that it depends on that data transitions occur at regular intervals. To guarantee this in an arbitrary data stream, extra coding bits must be added which reduces the bandwidth of the real information that can be transmitted in the data stream.

15

Multiple sampling of the data signal as it passes through a delay line.

The disadvantage of this technique is that the realization circuitry is complex.

Transmission of matched clock and data signals.

20 The disadvantage of this technique is that it places heavy demands on making both the clock path and the data path identical as well as on the transmission medium except when the transmission distances are very short.

The known techniques are unsuited for use in connection with high-speed data streams.

25

SUMMARY OF THE INVENTION

The object of the invention is to bring about an arrangement that is suitable for use in connection with high-speed data streams.

30 This is attained by means of the arrangement according to the invention for capturing data from a data stream of a predetermined data transfer rate by means of a flip-flop in

that the arrangement comprises a symmetrical multi-phase clock generator that is adapted to be locked to a reference clock which in turn is adapted to generate a reference clock signal at the data transfer rate or at a fraction thereof, the multi-phase clock generator being adapted to generate n clock signals mutually shifted $360^\circ/n$ from each other, and a selector that is connected to the clock generator to receive the n clock signals, the selector being adapted to select one of these n clock signals as the system clock signal in response to a control signal from a clock phase counter, the clock phase counter being controlled to count up or down in response to the phase of the system clock signal when a predetermined number of data transitions have occurred in the data stream, said flip-flop being adapted to be controlled by the opposite phase of the system clock signal to capture said data from the data stream.

The arrangement according to the invention synchronizes a clock system to a high-speed input data stream and can be used e.g. when high-speed synchronous data is to be sent between two circuits.

BRIEF DESCRIPTION OF THE DRAWING

The invention will be described more in detail below with reference to the appended drawing on which Fig. 1 is a block diagram of an embodiment of an arrangement according to the invention, and Figs. 2a-f are pulse diagrams showing the arrangement in Fig. 1 going into lock mode from various conditions.

DESCRIPTION OF THE INVENTION

In the embodiment illustrated in Fig. 1, a stream of data D to be captured is received on an input connected to the data input of a flip-flop $I2$. The data stream at the input is shown in Fig. 2a. The incoming data D is illustrated to have a '1010...' pattern in this embodiment as apparent from Fig. 2a.

Below, the description of the embodiment in Fig. 1 is divided into three sections, namely multi-phase clock generation, system clock adjustment, and clock demultiplexer control.

Multi-phase clock generation

To capture the incoming data by means of the flip-flop I2, a reference clock C is provided to generate clock pulses either at the data transfer rate, i.e. the pulse rate of the incoming data D, or at a sub-multiple thereof.

5

The reference clock C is connected to a symmetrical multi-phase clock generator that in the embodiment in Fig. 1 is comprised of a voltage controlled ring oscillator (VCRO) I3 with seven stages. Generally, the VCRO I3 can have any number n of stages. The number of stages is chosen to give a suitable resolution.

10

The VCRO I3 is designed to generate pulses at a pulse rate corresponding to the pulse rate of the incoming data through being adjusted by the reference clock C as described below.

15

The stages of the VCRO I3 consist of identical voltage controlled delay elements. Each delay element in the VCRO I3 is tapped, whereby seven different clock phases are provided, each subsequent phase shifted from the previous phase by $360^\circ/7$.

20

If the pulse rate of the reference clock C is a sub-multiple of the required clock rate, then a divider I6 is interconnected in the feedback loop from the VCRO I3 to the phase detector I5 to get the correct pulse rate for the VCRO I3 in the conventional manner.

25

A phase comparator I5 and a filter I4 are interconnected between the clock C and the VCRO I3 to lock the pulse rate of the VCRO I3 to the pulse rate of the reference clock C or to a multiple thereof in the conventional manner.

30

The taps of the VCRO I3 are connected to a phase selector in the form of a clock demultiplexer I7 in Fig. 1 that is adapted to pick one of these seven phases to be the system clock signal SC shown in Figs. 2b and 2d.

Any phase delays in the generation of the system clock pulses SC to this point are not important to the system performance. The only requirement is that the system clock can generate pulses at the required pulse rate.

5 System Clock Adjustment

In accordance with the invention, the system clock signal SC in Fig. 2b or 2d is controlled such that its negative transition occurs on a data transition. The positive transition of the system clock pulse is used to clock the data into the data flip-flop I2. This gives maximum set-up and hold times for the data flip-flop I2 within the resolution
10 of the VCRO I3.

A dual edge triggered flip-flop I1 is provided to sample the system clock signal SC in Fig. 2b or 2d on each transition of the incoming data D.

15 Depending if the system clock signal SC is high or low when a data transition occurs, a retard clock signal RC shown in Figs. 2c and 2e as outputted by the flip-flop I1 becomes high (system clock signal is high) or low (system clock signal is low) when a data transition occurs.

20 In the embodiment in Fig. 1, a divider I9 is provided to generate a counter clock signal CC on every third data transition as shown in Fig. 2f. This signal CC is used to clock a phase counter I8 that in this embodiment is a modulo 7 up/down counter.

25 Every third data transition is used in order to allow the clock loop to settle before it is subsequently adjusted. The third transition is unimportant, the number could be two or higher. However using an odd number allows any mismatch between odd and even data transitions to be averaged out.

30 Thus, in the embodiment in Fig. 1, the up/down counter I8 counts up or down on every third data transition, depending if the retard clock signal RC is high (count down) or low (count up).

The output signal of the up/down counter I8 controls the clock demultiplexer I7 as described later.

- 5 The incoming data *D* is continuously sampled by the data flip-flop I2 on the positive transition of the system clock signal SC.

The captured data CD (not shown) that is outputted by the flip-flop I2 is now synchronized to the system clock and is ready for use in the rest of the system.

10

The final "locked" position of the arrangement in Fig. 1 is that the negative transition of the system clock signal SC comes just before or just after a data transition. Within the resolution of the VCRO I3, this will give maximum set-up and hold times for the data flip-flop I2.

15

The arrangement according to the invention can be used to synchronize a clock system to a high-speed input data stream. It can be used when high-speed synchronous data is to be sent between two circuits. The speed of the data channel and the delay in the transmission medium make it impractical to use conventional synchronous techniques.

20

A reference clock pulse rate, which is the same as the data transfer rate or is a sub-multiple thereof, must be available at both the transmitter and the receiver.

25

The performance of this circuit depends only on the matching of the set-up and hold characteristics between the two flip-flops I1 and I2. This matching can be very well controlled. All other delays in the system are unimportant providing they meet the pulse rate requirement. The system locks after only a few data bits have been sent and thereafter does not depend on the content of the data being sent or on a particular data pattern to remain in lock. The system remains in lock even when no data is sent providing the transmitter and receiver clocks remain the same.

30

Clock Demultiplexer Control

For the sake of simplicity, the data D in Fig. 2a is shown to have a transition every cycle. If this is not the case, the counter clock signal cycle is extended and no modification takes place to the system clock signal SC until three data transitions have occurred.

5

Figs. 2b and 2c, illustrating the system clock signal SC and the retard clock signal RC, respectively, show what takes place when the system is trying to synchronize.

10

In this case, the system clock signal SC is too advanced. Consequently, the retard clock signal RC is high and on the positive edge of the counter clock signal CC, the clock phase counter I8 counts down. In its turn, the clock demultiplexer I7 is controlled to choose an earlier clock phase from the VCRO I3.

15

This is illustrated by the shortened system clock pulse denoted A in Fig. 2b.

The same thing happens at the next positive edge of the counter clock signal CC and the clock phase counter I8 again counts down.

20

When the system clock phase eventually becomes too retarded with respect to the incoming data, the retard clock signal RC goes low and the clock phase counter I8 counts up as illustrated by the lengthened system clock pulse denoted B in Fig. 2d.

25

Figs. 2d and 2e, illustrating the system clock signal SC and the retard clock signal RC, respectively, show what takes place when the system is in synchronization. The change of state of the clock phase counter I8 alternatively increases and reduces the system clock pulse length as indicated by a pulses B and A, respectively.

CLAIM

An arrangement for capturing data from a data stream of a predetermined data transfer rate by means of a flip-flop (I2), **characterized in that** the arrangement comprises

5 - a symmetrical multi-phase clock generator (I3) that is adapted to be locked to a reference clock which in turn is adapted to generate a reference clock signal at the data transfer rate or at a fraction thereof, the multi-phase clock generator (I3) being adapted to generate n clock signals mutually shifted $360^\circ/n$ from each other, and

- a selector (I7) that is connected to the clock generator (I3) to receive the n clock signals,
10 the selector (I7) being adapted to select one of these n clock signals as the system clock signal in response to a control signal from a clock phase counter (I8), the clock phase counter (I8) being controlled to count up or down in response to the phase of the system clock signal when a predetermined number of data transitions have occurred in the data stream, said flip-flop (I2) being adapted to be controlled by the opposite phase of the
15 system clock signal to capture said data from the data stream.

ABSTRACT

An arrangement for capturing data from a data stream of a predetermined data transfer rate by means of a flip-flop (I2), comprises a symmetrical multi-phase clock generator (I3) that is adapted to be locked to a reference clock which in turn is adapted to generate a reference clock signal at the data transfer rate or at a fraction thereof, the multi-phase clock generator (I3) being adapted to generate n clock signals mutually shifted $360^\circ/n$ from each other, and a selector (I7) that is connected to the clock generator (I3) to receive the n clock signals, the selector (I7) being adapted to select one of these n clock signals as the system clock signal in response to a control signal from a clock phase counter (I8), the clock phase counter (I8) being controlled to count up or down in response to the phase of the system clock signal when a predetermined number of data transitions have occurred in the data stream, said flip-flop (I2) being adapted to be controlled by the opposite phase of the system clock signal to capture said data from the data stream.

Fig. 1 to be published




Fig. 1

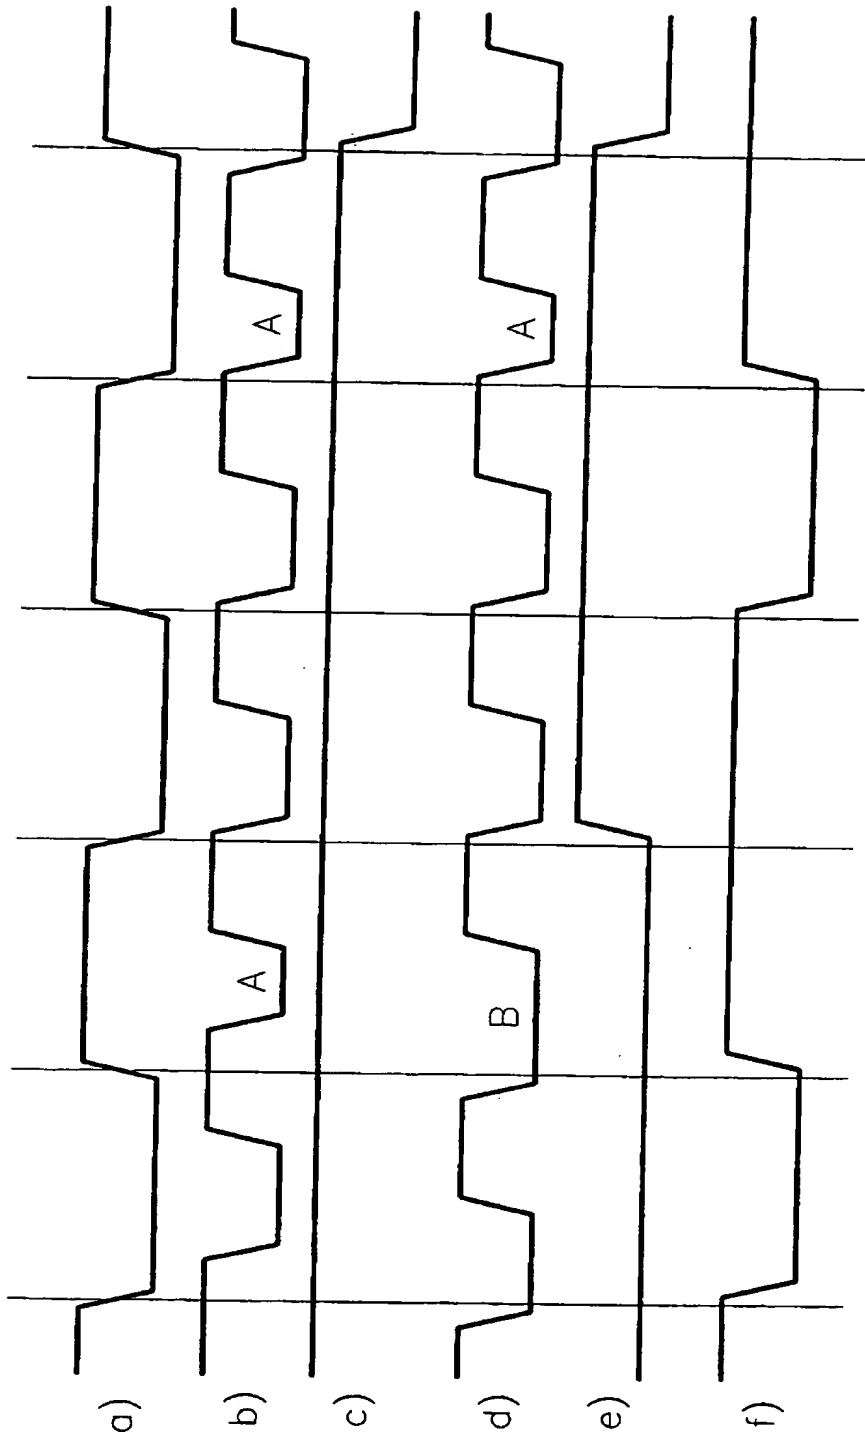


Fig.2